

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number
WO 2004/016907 A1

(51) International Patent Classification⁷: **E21B 43/36**,
B01D 17/00

(74) Agent: **HOFSETH, Svein**; Norsk Hydro ASA, N-0240
Oslo (NO).

(21) International Application Number:
PCT/NO2003/000265

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 1 August 2003 (01.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20023919 16 August 2002 (16.08.2002) NO

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **NORSK
HYDRO ASA** [NO/NO]; N-0240 Oslo (NO).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **GRAMME, Per**,
Elvind [NO/NO]; Steinringen 12, N-3931 Porsgrunn
(NO). **HAUKOM, Ivar** [NO/NO]; Ullernkammen 22,
N-0380 Oslo (NO).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A PIPE SEPARATOR FOR THE SEPARATION OF FLUIDS, PARTICULARLY OIL, GAS AND WATER

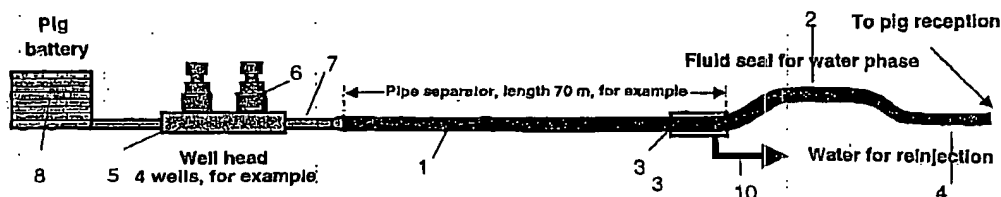

(57) Abstract: A pipe separator for the separation of fluids, for example separation of oil, gas and water in connection with the extraction and production of oil and gas from formations beneath the sea bed, comprising a pipe-shaped separator body (1) with an inlet and outlet that principally corresponds to the transport pipe (4, 7) to which the pipe separator is connected. The special feature of this solution is that a pipe bend or loop (2) is arranged in the pipe separator (1) or in connection with its outlet to form a downstream fluid seal in relation to the pipe separator (1), which is designed to maintain a fluid level in the pipe separator, but which also allows the pipe separator (1) and the loop (2) to be pigged.

WO 2004/016907 A1

WO 2004/016907

RCT/NO2003/000265

A PIPE SEPARATOR FOR THE SEPARATION OF FLUIDS, PARTICULARLY OIL, GAS AND WATER

The present invention concerns a pipe separator for the separation of fluids, for example separation of oil, gas and water in connection with the extraction and production of oil and gas from formations beneath the sea bed, comprising a pipe-shaped separator body with an inlet and outlet cross-section that principally corresponds to the transport pipe to which the pipe separator is connected.

"Principally" means that the separator body may have a slightly larger diameter that is necessary to achieve stratified gas, oil and water flows in the separator.

The applicant's own Norwegian patent applications nos. 19994244, 20015048, 20016216 and 20020619 describe prior art pipe separators for the separation of oil, water and/or gas downhole, on the sea bed or at the surface. However, these solutions have the disadvantage that they cannot be cleaned internally with mechanical devices, so-called "pigs" or reamers.

The present invention represents a pipe separator solution in which it is possible to use such devices. The present invention is characterised in that a pipe bend or loop is arranged in the pipe separator or in connection with its outlet to form a downstream fluid seal in relation to the pipe separator, which is designed to maintain a fluid level in the fluid separator, but which also allows the separator and the loop to be reamed.

The dependent claims 2-4 indicate the advantageous features of the present invention.

The present invention will be described in further detail in the following by means of examples and with reference to the attached figures, where:

Fig. 1 a1), a2) show a principle drawing of a pipe separator with a fluid seal in accordance with the present invention partly seen from above a1) and from the side a2), and Fig. 1b) shows an elevation of the fluid seal itself in an enlarged scale.

WO 2004/016907

PCT/NO2003/000265

2

Figs. 2-6 show alternative embodiments of the same pipe separator with a fluid seal.

As stated above, Fig. 1 shows a pipe separator 1 with a fluid seal 2 in accordance with the present invention. The pipe separator is connected to a well head 5 with four wells 6, shown here, via a transport pipe/supply pipe 7. Upstream of the well head 5, there is a pig magazine 8 with plgs (not shown) for pigging the downstream pipe, separator and fluid seal 7, 1, 2. The fluid seal 2 is downstream in the separator 1 and constitutes, in the example shown here and subsequent examples, an integrated part of the separator itself. The fluid seal 2 is designed as a pipe bend or loop that extends from the mainly horizontal end part 3 of the separator upwards and then downwards and across in a mainly horizontal outlet part of the separator or outlet pipe/transport pipe 4.

When designing the fluid seal 2, it is, of course, necessary to ensure that the radiuses of curvature are large enough to ensure that pigs and other relevant equipment can pass through easily.

In the above, the expression "fluid seal" is used about the invention to illustrate that the present invention can be used to separate any type of fluid consisting of two or more fluid components. However, as the example shown in the figures concerns the production of oil and gas, here it is a "water seal" for the removal of separated water from the oil flow. At the transition to the water seal 2, upstream of it, there is, therefore, a recess 9, expediently with a perforation on top of it, for draining water from the separator via a drainage pipe 10. The perforation prevents the reamer from entering the drainage opening and ensures a smooth inflow along the flow path over the recess 9. The water can be reinjected in an adjoining injection well or is transported away for treatment or storage in a tank or similar (not shown).

The method of operation of the present invention is thus that oil and water, possibly including small quantities of gas, that flow from the well head 5 are separated in the separator and the oil and the small quantity of gas present flow through the fluid seal and on to the transport pipe 4, while the separated water is drained from the separator via the pipe 10. The separator can expediently be equipped with a phase measuring

WO 2004/016907

PCT/NO2003/000265

3

device and phase regulator to control the water level and ensure at all times that the necessary quantity of water is drained.

With the solution shown here, it is possible to ream or perform pigging of the separator and pipes connected in an easy manner.

Fig. 2 shows a solution similar to that shown in Fig. 1. Here, however, in a situation in which relatively large quantities of gas are produced (high gas/oil ratio), a cyclone is fitted in connection with the well head to separate the gas before the fluid is separated in the separator in order to avoid the formation of slugs, turbulence and the re-admixture of the fluid phase in the water seal. The gas that is separated in the cyclone can be conducted via a pipe 12 to a well nearby for reinjection or is conducted back in the transport pipe 4 downstream of the separator 1.

Fig. 3 shows an alternative solution similar to the solution shown in Fig. 2. After the well head 5, but before the separator 1, there is a slug damper 12 ahead of the inlet of the separator 1. As it will not be possible to send a pig through such a slug damper, the pig sender and pig battery 8 are arranged so that the supply pipe 13 for the pig is connected to the separator 1 downstream of the slug damper 12.

Fig. 4 shows another alternative embodiment similar to the solution shown in Fig. 1. Here, however, the gas, with a high fluid/gas ratio, is conducted in a bypass pipe 14 past the water seal. The gas pipe 14 is expediently connected to the separator upstream of the water seal 2 and is connected to the transport pipe 4 downstream of the water seal.

Yet another alternative embodiment is shown in Figs. 5 and 6. The solution is intended to be used for medium-heavy oils with dewatering of the oil phase to 0.5% water and is based on the embodiment shown in Fig. 2 in which a cyclone 11 is used to separate gas before the pipe separator 1. The oil flow from the pipe separator 1 (Fig. 5) is conducted,

WO 2004/016907

PCT/NO2003/000265

4

after the water seal 2, to a downstream compact electrostatic coalescer 15 (Fig. 6) and subsequently to an additional oil/water separator 16 that separates any remaining water after the separation in the pipe separator 1. The gas from the cyclone 11 is conducted back to the oil flow in the transport pipe 17 after the additional oil/water separator 16.

WO 2004/016907

PCT/NO2003/000265

5

Claims

1. A pipe separator for the separation of fluids, for example separation of oil, gas and water in connection with the extraction and production of oil and gas from formations beneath the sea bed, comprising a pipe-shaped separator body (1) with an inlet and outlet that principally corresponds to the transport pipe (4, 7) to which the pipe separator is connected,
characterised in that
a pipe bend or loop (2) is arranged in the pipe separator (1) or in connection with its outlet to form a downstream fluid seal in relation to the pipe separator (1), which is designed to maintain a fluid level in the pipe separator, but which also allows the pipe separator (1) and the loop (2) to be pigged.
2. A pipe separator in accordance with claim 1,
characterised in that
there is a cyclone (11) in connection with the well head(s) upstream of the pipe separator (1) for the separation of gas and that the gas is designed to be conducted in a pipe (12) back to the transport pipe (4) downstream of the pipe separator (1).
3. A pipe separator in accordance with claim 1,
characterised in that
a bypass pipe (14) for gas is designed to conduct gas around the fluid seal (2) and that the inlet of the pipe (14) is connected to the pipe separator upstream of it, while the outlet is connected to the transport pipe (4) downstream of the pipe separator (1).

WO 2004/016907

PCT/NO2003/000265

6

4. A pipe separator in accordance with claims 1 and 2, characterised in that there are a compact electrostatic coalescer and, after it, an additional separator (16) downstream of the pipe separator (1) and that the gas from the cyclone (11) is designed to be conducted back to the transport pipe (4) after the additional separator (16), while the separated water from the additional separator (16) is designed to be conducted to reinjection in a well nearby.

WO 2004/016907

PCT/NO2003/000265

1/5

Figure 1a1

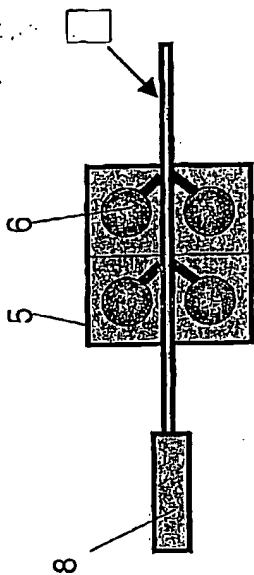


Figure 1a2


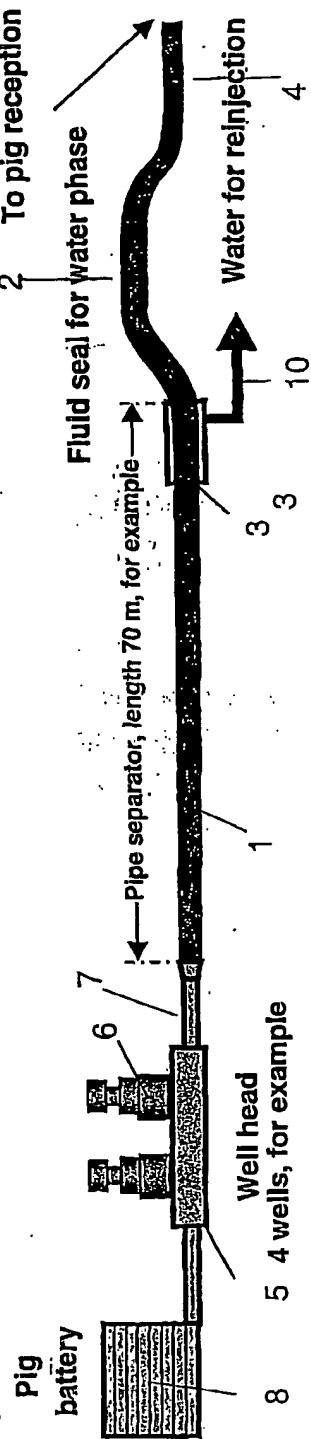


Figure 1b

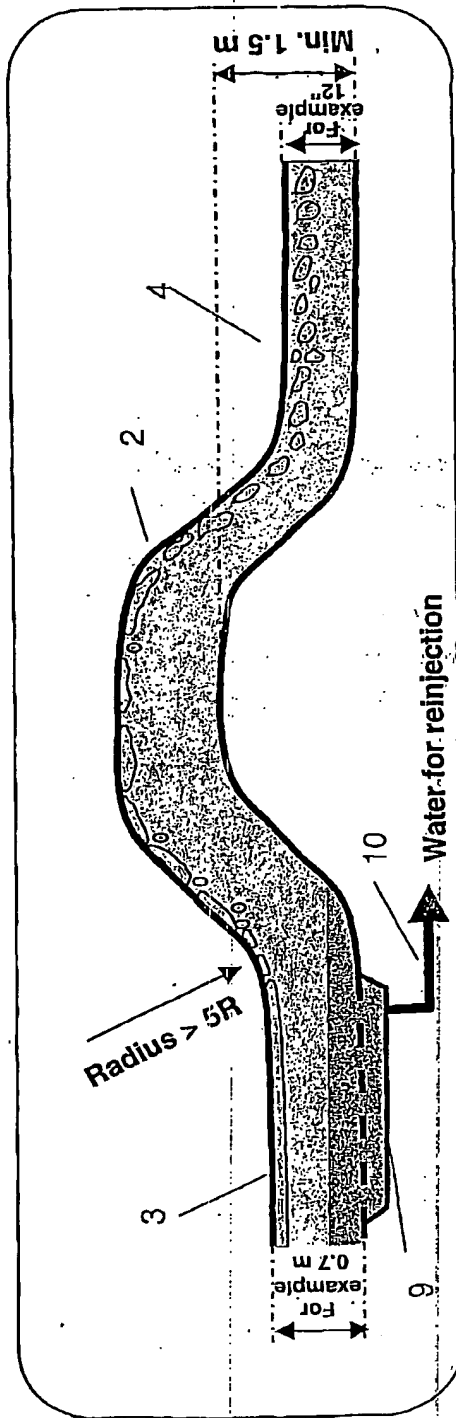

WO 2004/016907

PCT/NO2003/000265

2/5

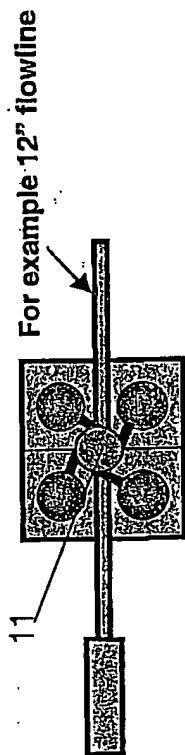


Figure 2a1

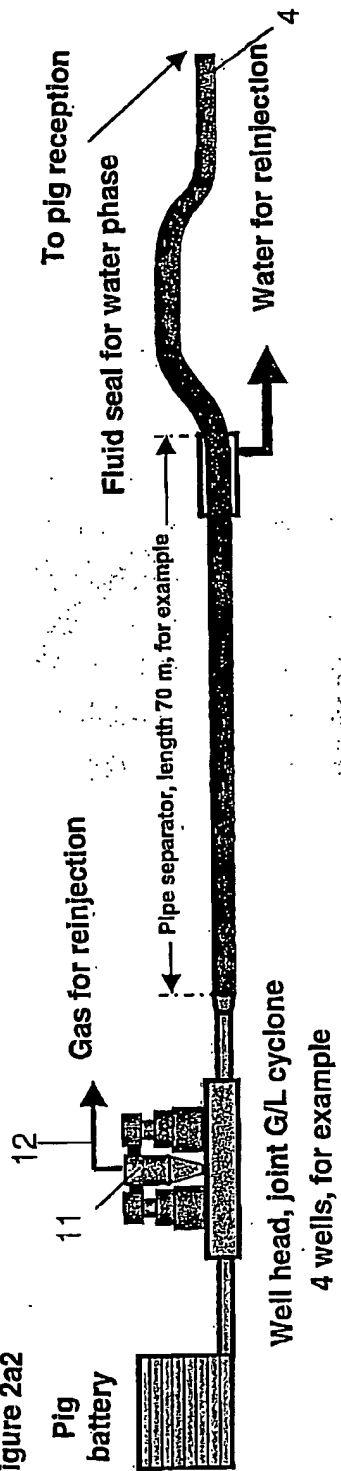


Figure 2a2




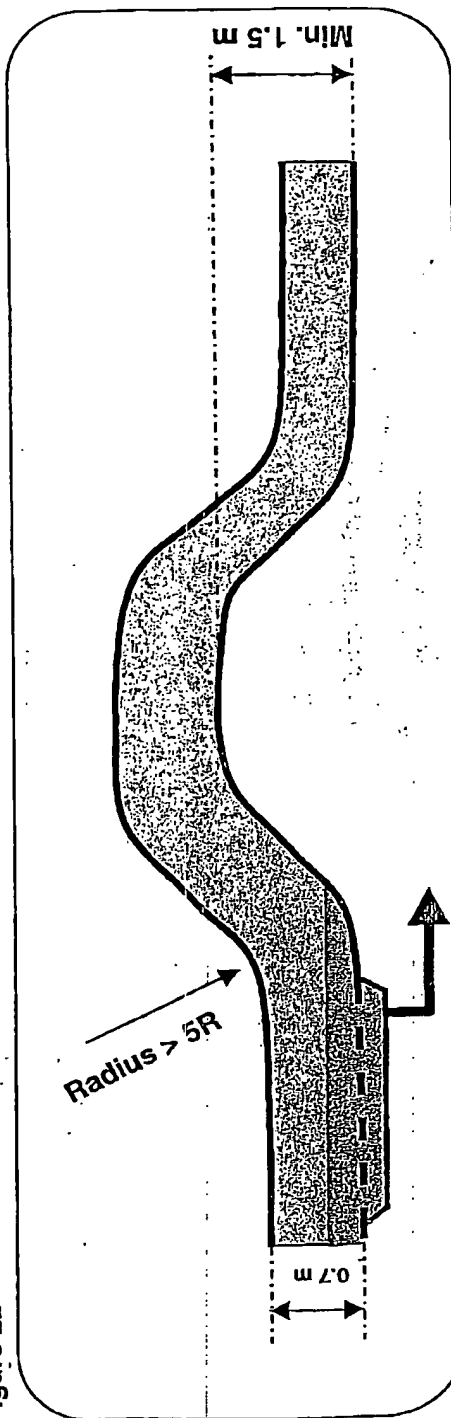


Figure 2b

WO 2004/016907

PCT/NO2003/000265

3/5

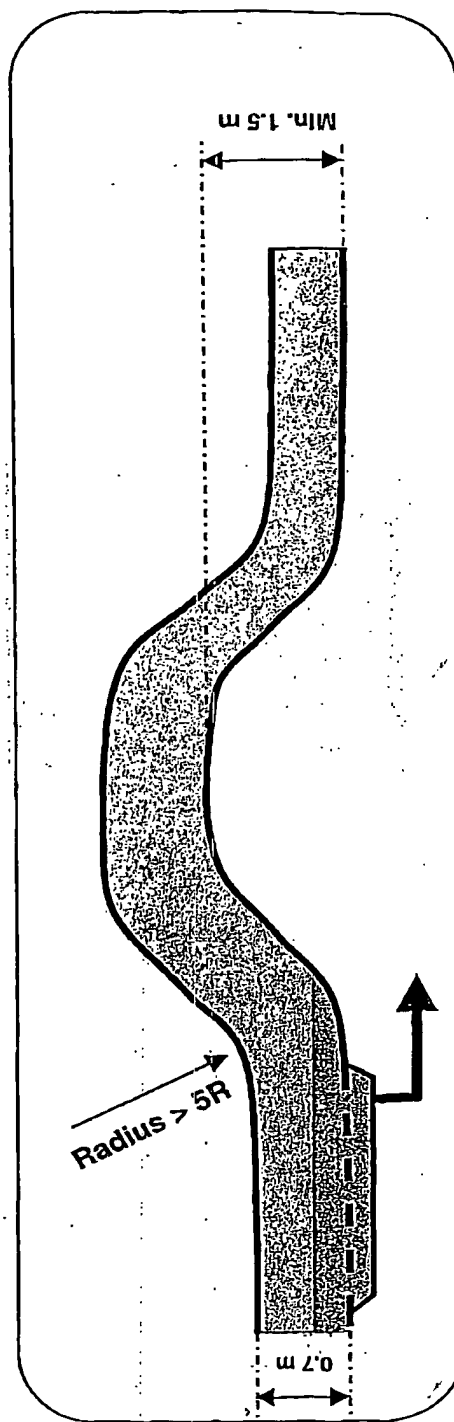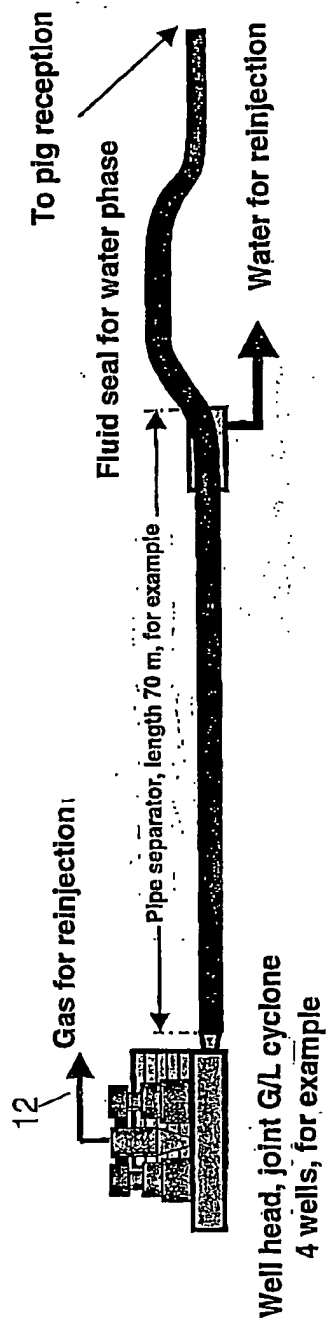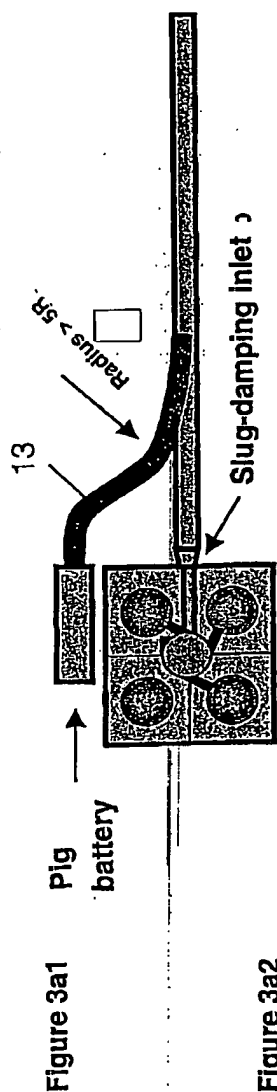

WO 2004/016907

PCT/NO2003/000265

4/5

Figure 4a1

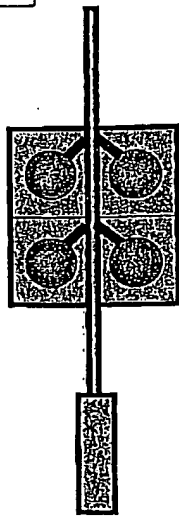


Figure 4a2


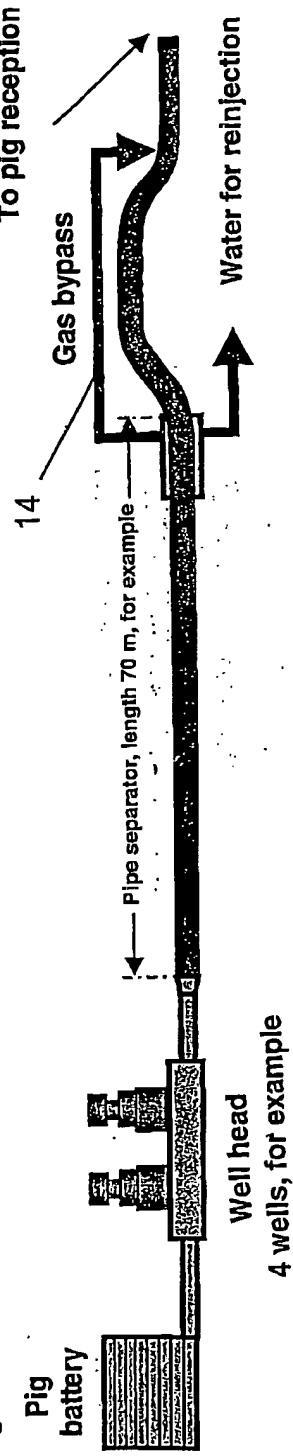


Figure 4b

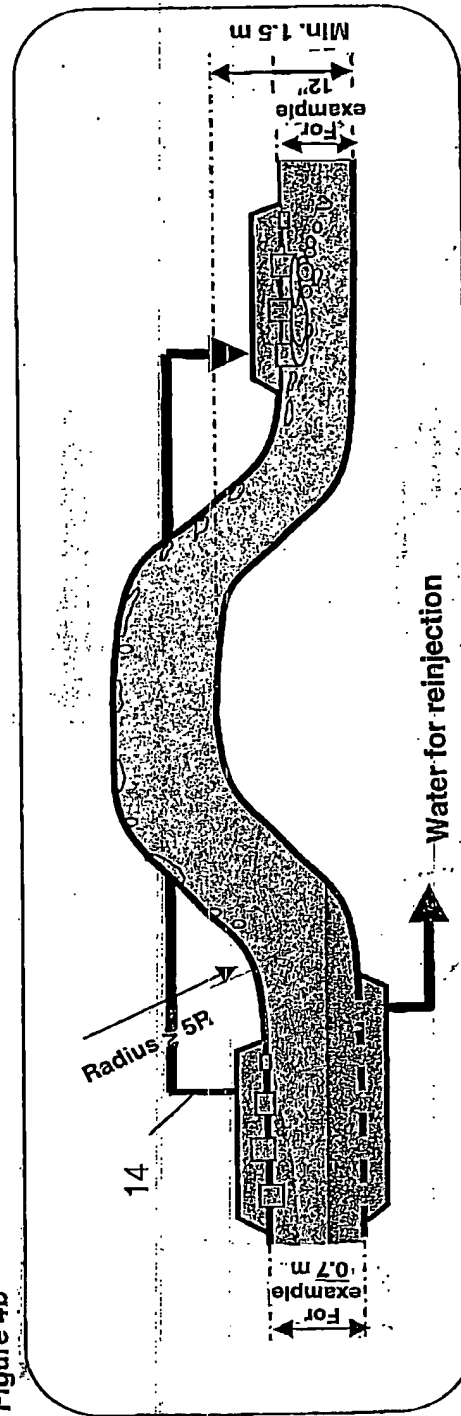

WO 2004/016907

PCT/NO2003/000265

5/5

Figure 5


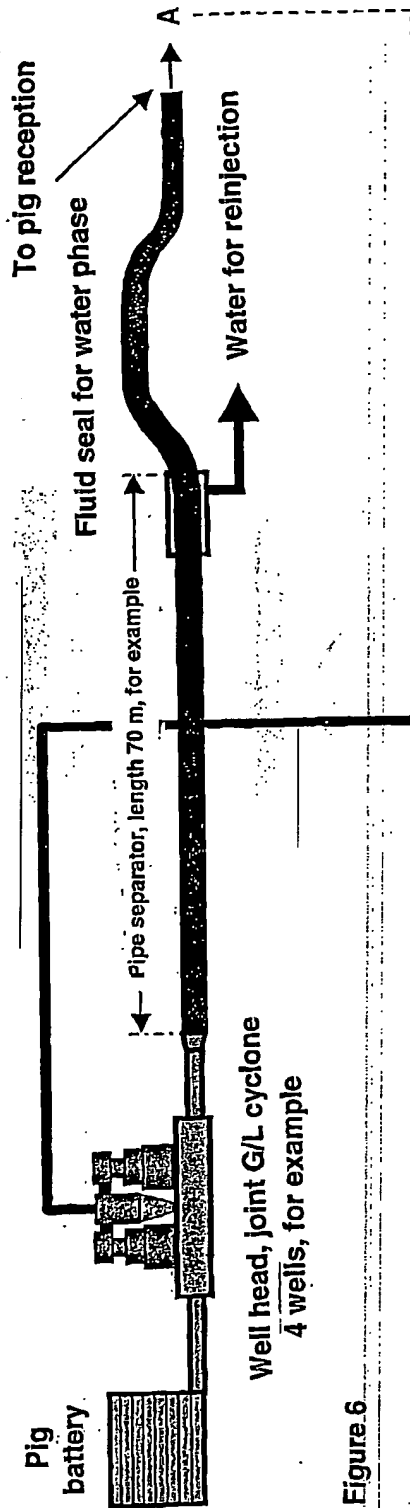


Figure 6

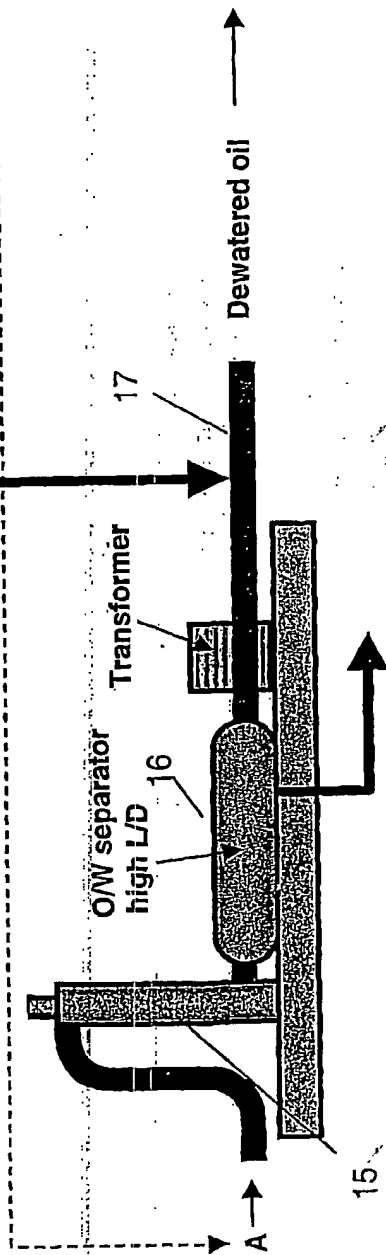

Best Available Copy

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 03/00265

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: E21B 43/36, B01D 17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: E21B, B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0331295 A1 (NORSK HYDRO A.S.), 6 Sept 1989 (06.09.89)	1-4
A	US 4705114 A (W.W. SCHROEDER ET AL), 10 November 1987 (10.11.87)	1-4
A	GB 2239193 A (W.D. BLENKINSOP), 26 June 1991 (26.06.91)	1-4

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 October 2003

Date of mailing of the international search report

24-10-2003

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Christer Bäcknert / MRo

Telephone No. +46 8 782 25 00

Best Available Copy

INTERNATIONAL SEARCH REPORT

Information on patent family members

06/09/03

International application No.
PCT/NO 03/00265

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0331295	A1	06/09/89	BR	8900411 A	26/09/89
				DE	68903771 D,T	13/05/93
				ES	2036339 T	16/05/93
				NO	163424 B,C	12/02/90
				NO	880465 A	04/08/89
US	4705114	A	10/11/87	BR	8603337 A	24/02/87
				CA	1258620 A	22/08/89
				CN	86104803 A	14/01/87
				DE	3622995 A	12/02/87
				DK	334586 A	16/01/87
				GB	2177739 A,B	28/01/87
				GB	8517760 D	00/00/00
				NL	8601726 A	02/02/87
GB	2239193	A	26/06/91	GB	8928659 D	00/00/00

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.